

4660

WIRELESS SMOKE DETECTOR



The 4660 is a Class 6 (supervised) wireless smoke detector for operation with the FM4000 control panel.

RECOMMENDED BATTERY Duracell MN1604 or Eveready Energizer. To obtain maximum battery life a 9v Lithium battery is preferred. When changing a battery, wait 10 seconds before re-connecting to ensure a clean re-boot.

ADDING A DETECTOR TO THE FM4000 CONTROL PANEL

Connect the detectors battery.

1. Enter the engineers program mode by keying in the engineer code 4679
(The alarm LED will illuminate to indicate that you are in the engineer mode)
2. Key in 10.
3. Short out the learn jumper on the detector.
(The panel will bleep twice and zone 1 LED will illuminate to indicate that one detector is programmed onto that zone). To remove all detectors from the zone, press both the Off and Part Set key. (All zone LED's will go out).
4. Press the Full Set key to accept.
5. Key in 48 to exit engineer programming.

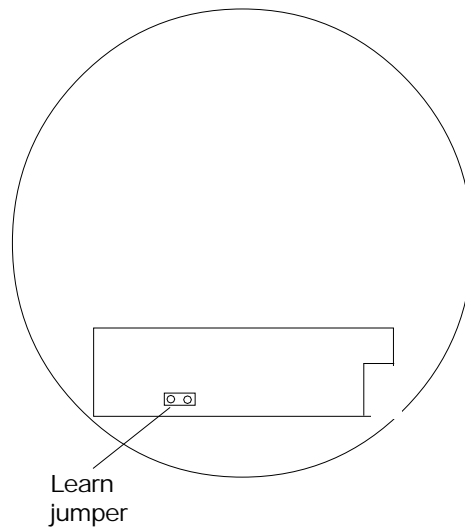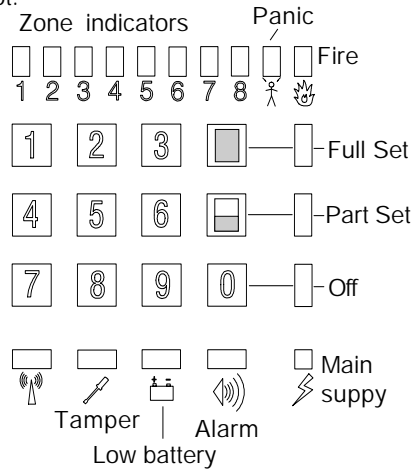

CI-97iss 1