

4665-GB WIRELESS HEAT DETECTOR

The 4665-GB is a Class 6 wireless heat detector for operation with the FM4000E / FM4000X control panel. This unit is suitable for use with *supervised* systems.



RECOMMENDED BATTERY Duracell MN1604 or Eveready Energizer for the detector & 2 x Quality AA Cells Duracell or Eveready preferred.

When changing a battery, wait 10 seconds before re-connecting to ensure a clean re-boot.

ADDING A DETECTOR TO THE FM4000E CONTROL PANEL

Connect the detectors batteries.

1. Enter the engineers program mode by keying in the engineer code 4679
(The alarm LED will illuminate to indicate that you are in the engineer mode)
2. Key in 10. The zone LED's illuminated show how many devices have been learnt.
3. Short out the learn jumper in base of the detector.
(The panel will bleep twice and the zone 1 LED (or appropriate led for the number of devices learnt).
4. Press the Full Set key to accept.
5. Key in 48 to exit engineer programming.

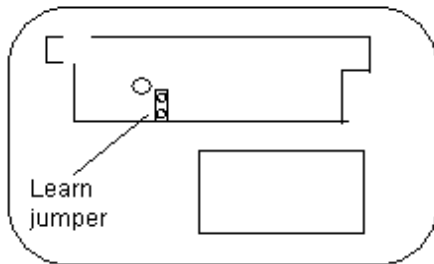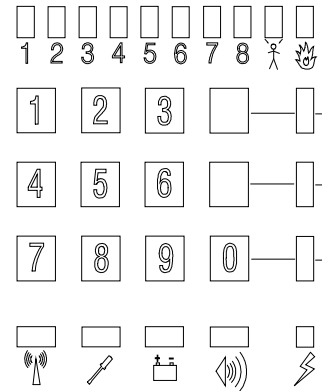

CI-227 Iss2



South Walk, Vantage Point Business Village, Mitcheldean, Gloucestershire, GL17 0DD
 Tel. 01594 827070 email. sales@fmelectronics.co.uk www.fmelectronics.co.uk
 FM Electronics is the Manufacturing division of **FM Security Limited**